


NOTES:


CORRECT ORIENTATION OF GEOSYNTHETIC TO OBTAIN PROPER STRENGTH SHALL BE DETAILED ON CONTRACTOR DRAWINGS.

ADJACENT WIDTHS OF REINFORCEMENT SHALL BE EXTENDED AS NECESSARY AND NOT PLACED DIRECTLY ON TOP OF EACH OTHER.

MINIMUM OF 3" OF SOIL FILL IS REQUIRED BETWEEN OVERLAPPING REINFORCEMENT FOR PROPER ANCHORAGE

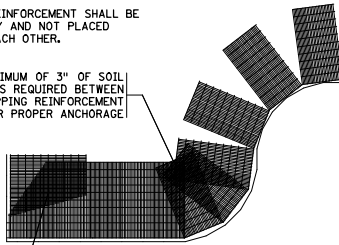


REINFORCEMENT PLACEMENT AROUND CURVES AND CORNERS

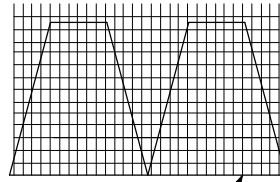


REINFORCEMENT IS TO BE PLACED ON LEVEL BACKFILL AND EXTENDED TO FRONT FACE OF OVERLYING BLOCKS. PLACE NEXT UNIT, PULL REINFORCEMENT TAUT AND BACKFILL AS REQUIRED.


REINFORCEMENT PLACEMENT BETWEEN BLOCK UNITS

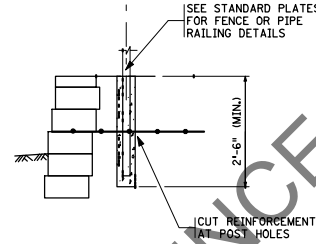

POST DETAIL
TYPICAL HANDRAIL AND/OR FENCE POST

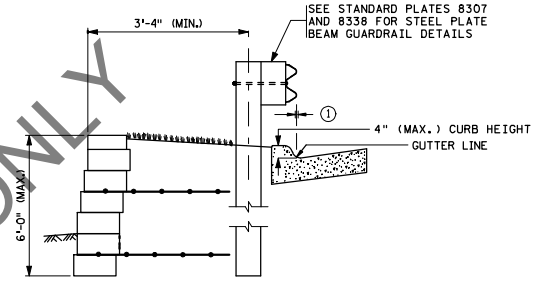


STEEL PLATE BEAM GUARDRAIL DETAIL 1

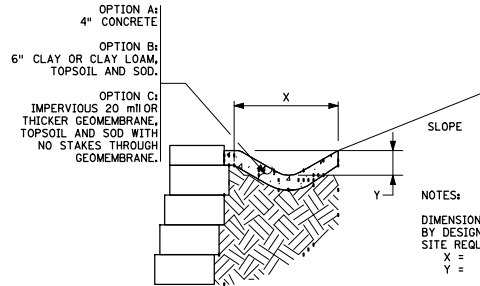

TYPICAL DRAIN SWALE DETAIL

NOTES:
DIMENSIONS TO BE DETERMINED BY DESIGN ENGINEER BASED ON SITE REQUIREMENTS.
X =
Y =


SEE PLAN VIEW FOR SURFACE DRAINAGE PATTERNS.

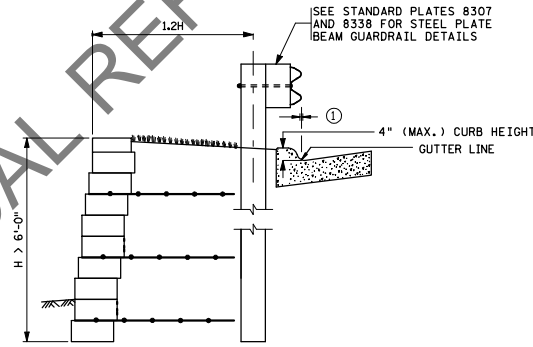

STEEL PLATE BEAM GUARDRAIL DETAIL 2
(AADT SHALL BE LESS THAN 5000)
STEEL PLATE BEAM GUARDRAIL SHOWN.

NOTES:

① USE CAUTION WHEN PLACING CURB WITH GUARDRAIL. CURBS ADVERSELY AFFECT THE PERFORMANCE OF THE GUARDRAIL. GENERALLY PLACE CURB DIRECTLY BELOW GUARDRAIL. SEE PLANS OR REFER TO STANDARD PLAN 5-297.601 (2). FOR CURB LOCATIONS ON NCHRP REPORT NO. 350 APPROVED BRIDGE TRANSITIONS, SEE STANDARD PLANS 5-297.603, .605, .606 ETC..

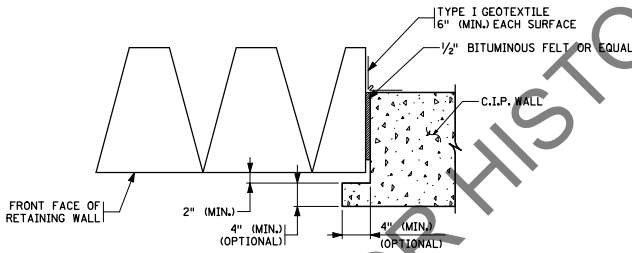

CONNECTION DETAIL AT JUNCTURE OF MSEW AND C.I.P. STRUCTURE

REVISED:
APPROVED:
Samuel J. Peterson
STATE BRIDGE ENGINEER

STANDARD SHEET NO. 5-297.645	TITLE: MODULAR BLOCK RETAINING WALL DETAILS
STANDARD APPROVED: MARCH 19, 2003	
STATE PROJ. NO.	(TH) SHEET NO. OF SHEETS